




SRS100

An efficient ribbon designed for everyday labelling

Key Benefits

- Excellent print quality and consistency
- High print density ensuring optimal readability
- Reduced plastic usage (12%) achieved through a thinner PET base film

Technical Specifications

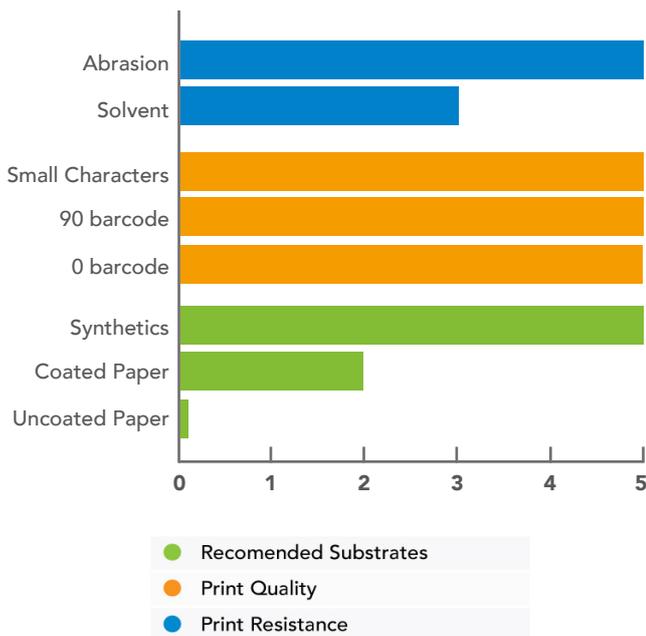

Film thickness	4,5µm
Total ribbon thickness	<9µm
Ink melting point	100°C
Coefficient of friction	Not relevant
Ink blackness	>0.8 ODR
Antistatic designed	

Flex Line

Best-in-class, versatile ribbons covering a wide spectrum of materials and applications.



Printer Parameters

Maximum speed:



Heat settings: 100°C



Storage Conditions

12 months recommended

20-80% Relative Humidity

5-30°C temperature

Approvals

REACH / SVHC 1907/2006/EC	Mineral Oils limits
ISEGA food contact	PFA's free
ROH3	Halogen free
UL Certification	other market standards

Applications



Electronics



Manufacturing



Healthcare



Transport & Logistics



Chemicals



Automotive

For more information please contact your SATO representative or visit our website satoeurope.com