




# SWR100

An efficient ribbon designed for everyday labelling

## Key Benefits

- Excellent print quality and consistency
- High print density ensuring optimal readability
- Reduced plastic usage (12%) achieved through a thinner PET base film

## Technical Specifications

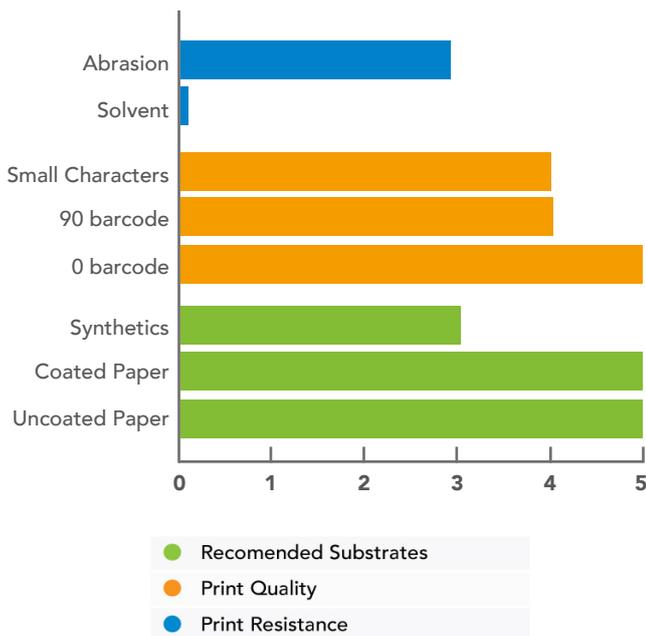

Film thickness	4µm
Total ribbon thickness	<9µm
Ink melting point	77°C
Coefficient of friction	Kd < 0,2
Ink blackness	2,1 ODR
Antistatic designed	


## Flex Line

Best-in-class, versatile ribbons covering a wide spectrum of materials and applications.



## Printer Parameters

Maximum speed:

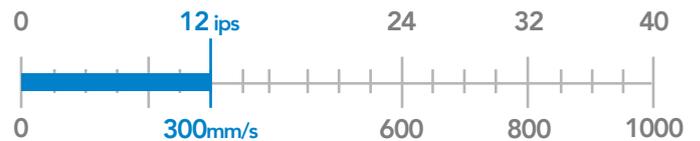

Heat settings: 100°C



## Storage Conditions

12 months recommended

20-80% Relative Humidity

5-35°C (40-95°F) temperature

## Approvals

REACH / SVHC 1907/2006/EC

EU Food Contact 1935/2004/EC

US Food Contact FDA

RoHS / Heavy Metals 2011/65/EU

California Proposition 65

Halogens IEC 61249-2-21:2003

## Applications



Food & Beverage



Manufacturing



Healthcare



Transport & Logistics



Retail



Automotive



Horticulture

For more information please contact your SATO representative or visit our website [satoeurope.com](http://satoeurope.com)