



SWX100

Resin-enhanced wax ribbon for paper

Key Benefits

- Resin-enhanced wax formulation
- Compatible with coated and uncoated paper labels and tag stocks
- High print quality with high-sensitivity ink system
- Antistatic and PrintheadSaver coatings for stable printing and printhead protection
- Suitable for RFID applications


Flex Line

Best-in-class, versatile ribbons covering a wide spectrum of materials and applications.



Printer Parameters


Maximum speed:

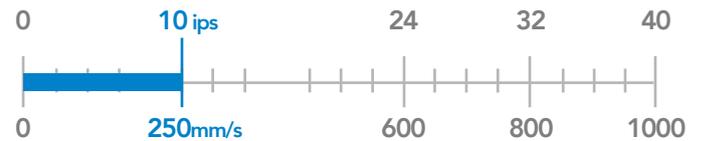

Heat settings: 70°C



Technical Specifications

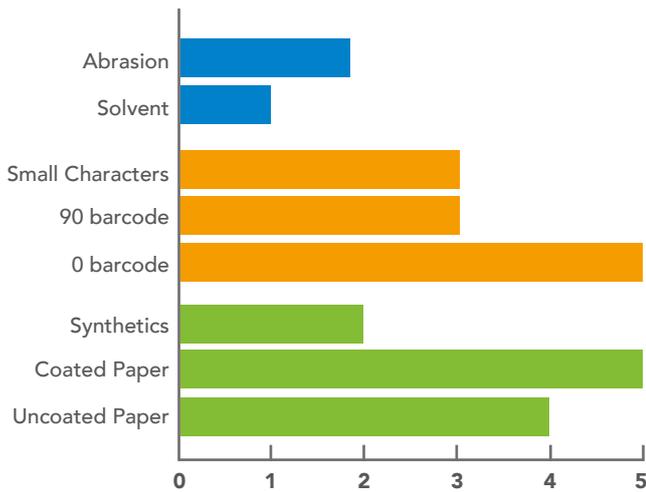

- Print Resistance
- Print Quality
- Recommended Substrates

General Information

Film thickness	4,5µm
Total ribbon thickness	<8µm
Ink melting point	70°C
Coefficient of friction	not relevant
Ink blackness	> 1.90 ODR
Antistatic designed	

Storage Conditions

12 months recommended

20-80% Relative Humidity

5-30°C temperature

Approvals

REACH	PFA's free
ISEGA food contact	Mineral Oils limits
ROH3	UL certification
Halogen free	Other market standards

Applications



Transport & Logistics



Food & Beverage



Retail

For more information please contact your SATO representative or visit our website satoeurope.com