



SWX85

Competitive wax ribbon for paper substrates

Key Benefits

- High print quality for most barcode types
- Cost-efficient solution for high-volume wax usage
- Compatible with a wide range of paper label stocks


Value Line

Cost-efficient, reliable ribbons for high-volume, price sensitive applications.



Printer Parameters


Maximum speed:

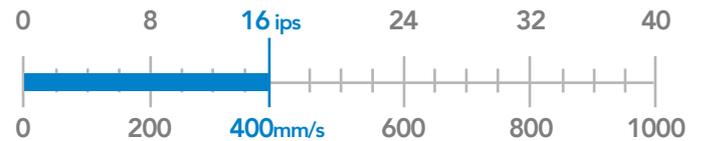

Heat settings: 100°C



Technical Specifications

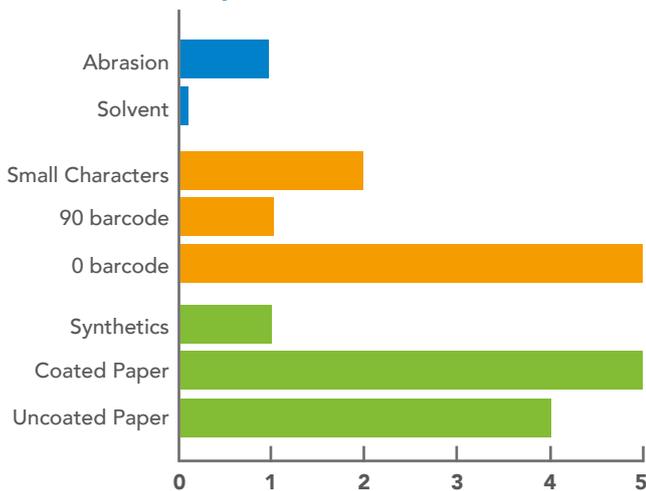

- Print Resistance
- Print Quality
- Recommended Substrates

General Information

Film thickness	4,5µm
Total ribbon thickness	<8µm
Ink melting point	65°C
Coefficient of friction	Kd < 0,2
Ink blackness	2,1 ODR
Antistatic designed	

Storage Conditions

12 months recommended

20-80% Relative Humidity

5-35°C temperature

Approvals

REACH / SVHC 1907/2006/EC

EU Food Contact 1935/2004/EC

US Food Contact FDA

RoHS / Heavy Metals 2011/65/EU

California Proposition 65

Halogens IEC 61249-2-21:2003

Applications



Transport & Logistics



Food & Beverage



Retail

For more information please contact your SATO representative or visit our website satoeurope.com