




SWX95

High performance ribbon for paper substrates

Key Benefits

- Prints on a broad range of label materials from rough to smooth
- Good print darkness for perfect readability
- Suitable for all conventional large volume wax applications

Technical Specifications

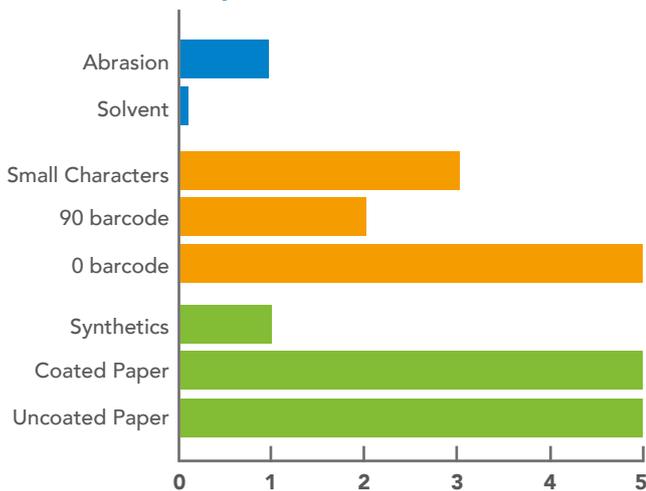

- Print Resistance
- Print Quality
- Recommended Substrates

General Information

Film thickness	4,5µm
Total ribbon thickness	<9µm
Ink melting point	65°C
Coefficient of friction	Kd < 0,2
Ink blackness	2 ODR
Antistatic designed	


Flex Line

Best-in-class, versatile ribbons covering a wide spectrum of materials and applications.



Printer Parameters

Maximum speed:

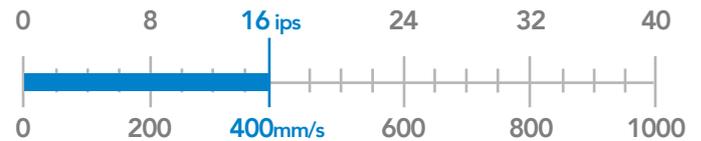

Heat settings: 100°C



Storage Conditions

12 months recommended

20-80% Relative Humidity

5-35°C temperature

Approvals

REACH / SVHC 1907/2006/EC

EU Food Contact 1935/2004/EC

US Food Contact FDA

RoHS / Heavy Metals 2011/65/EU

California Proposition 65

Halogens IEC 61249-2-21:2003

Applications



Transport & Logistics



Food & Beverage



Retail

For more information please contact your SATO representative or visit our website satoeurope.com