


# CLNX Plus Barcode Checker Quick Guide

## Recommended Scanner DATALOGIC/GFS4500



When the barcode reader is connected, the following reader types are automatically selected.

And also, it can check the following menu item to see if barcode reader is connected via USB. **Due to missing update, it will still show GFS4400 even when connected to GFS4500, until new software update is available.**

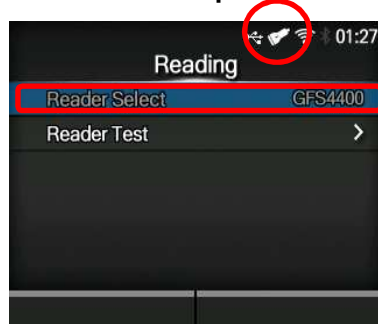

## Setting Procedure

It will need setting for the interface to "USB CDC" by reading the 2D code (DataMatrix) as below.

### < Standard Procedure >

First, push the blue key (red circle) on scanner for 5 seconds.  
(Release the key after beep sound.)

Next, read 2D code (A) and (B) with pushing the blue key.

- (1) Read **(A)**. (4 low beep sound.)
- (2) Read **(B)**. (2 and 4 high beep sound.)

After that, push the blue key for 5 seconds again.  
(Release the key after beep sound.)

And then, read 2D code (A) and (C) with pushing the blue key.

- (3) Read **(A)**. (4 low beep sound.)
- (4) Read **(C)**. (2 low beep sound.)
- (5) Read **(A)**. (4 low and 4 high beep sound.)

### < Re-Setting Procedure >

If you don't know the scanner setting, please do re-setting.

First, push the blue key (red circle) on scanner for 5 seconds.  
(Release the key after beep sound.)

Next, read the 2D code **(D)** with pushing the blue key.

- (1) Read **(D)**. (2 and 4 high beep sounds.)

After that, the scanner will be rebooted automatically.  
And then, do the **< standard procedure >** as above.

### Note:

When you change the scanner setting, it will be rebooted automatically with beep sounds.



Scanner Overview



(A) Enter/Exit  
Programming Mode



(B) Select  
USB-COM STD <sup>a</sup>



(C) Serial Online



(D) Restore Custom  
Default Configuration