

SWR-300 WAX-RESIN NEAR EDGE RIBBON ON FLEXIBLE **PACKAGING BY SATO**

APPLICATIONS



Healthcare



Retail



Pharmaceutical





Flexible Packaging

FEATURES

Low printhead energy

Abrasion resistance

Print flexibility

High density print

High speed


Anti-static printhead saver coating for printhead protection

TECHNICAL INFORMATION

SWR-300

RIBBON PROPERTIES

| Ink | Wax Resin |
|--------------------------------|----------------------|
| Colour | Black |
| Thickness | <8.0μm |
| Carrier | 4.5µm Polyester Film |
| Ink Melting Point | 70°C |
| Optical Density (transmission) | >0.80 |
| Optical Density (reflective) | >1.60 |
| Maximum Print Speed | 800mm/s |

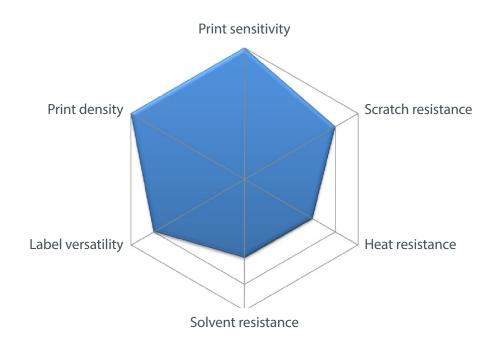

PRINTING SUBSTRATES

| Papers | Uncoated, Coated, Card |
|------------|--|
| Synthetics | Polyester, Polyethylene, Polypropylene, PVC |

